NOTES:

I. MATERIALS AND FINISHES:

BODY - BRASS, GOLDPLATING.

CONTACT - BeCu, GOLD PLATING. INSULATOR - PTFE

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

3. MECHANICAL:


A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65°C TO +165°C.

4. PACKAGING:


A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED


"AMPHENOL RF, 901-9841, AND DATE CODE"

901-9841		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 🕀 🖯		RELEASE TO MFG.			
	В	RE-DRAWN IN PRO-E, ADD COD	5/16/11	47678	CL

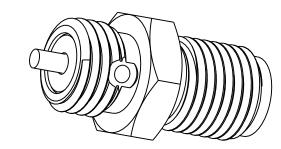

SCALE 4.000

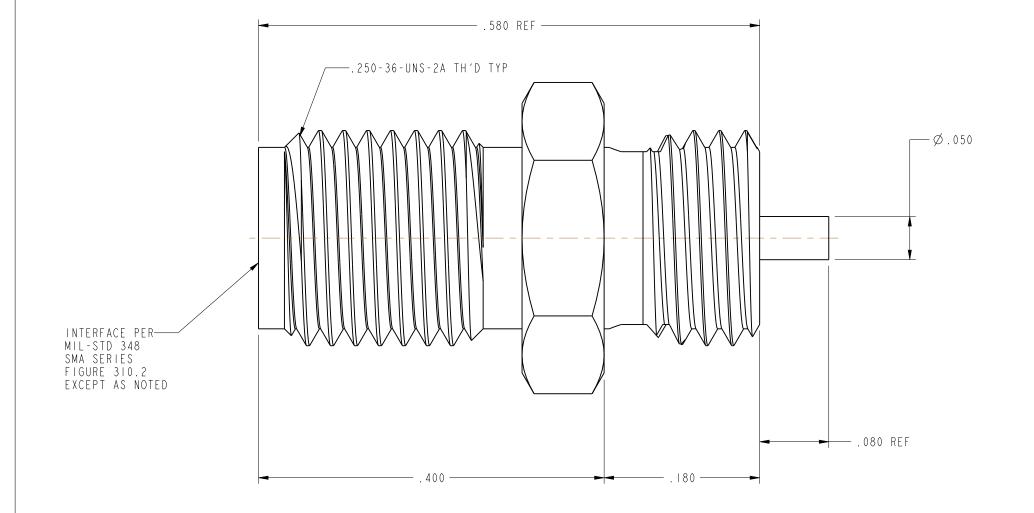

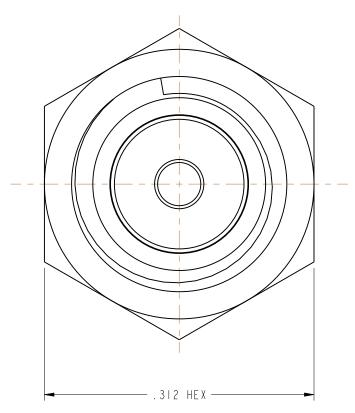

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN CLEMENT	26 Jun - 09	TITLE SMA JACK	Amphenol RF Danbury, CT, USA Tainan, Taiwan Shenzhen, China	
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they	REFERENCE	ENGINEER RAV	DATE 28 - Jul - 93	RECEPTACLE		
are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting		APPROVED K. CAPOZZI	DATE 5/19/11		www.amphenolrf.com SCALE: 9.0:1 SHEET 2 OF 2	
rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		CAD FILE	<u>'</u>	code id dwg sizedrawing	NO. 901-9841 B	